

RMC-15D-0

Applications

Internet Server (Web / Mail)


HPC Clustering

Database Server

File Server

NAS / iSCSI

High-end Workstation

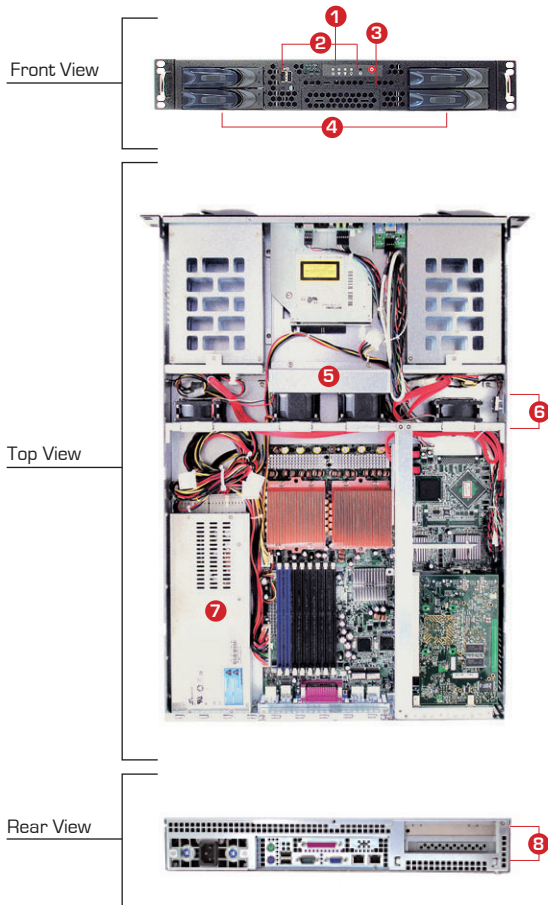

Features & Benefits

- 1 Power on/off, system reset and LEDs for HDD & LAN
- 2 Front access USB ports
- 3 One(1) external slim CD-ROM supported
- 4 Four(4) external 3.5-inch hot-swap HDD supported
- 5 Front-to-back ventilation for superior cooling
- 6 Four(4) hot-swap middle fans for optimized cooling
- 7 1U form factor power supply
- 8 Two(2) PCI slots via riser card

Model Number : RMC-15D-2	
Order Information : RMC-15D-●■-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty preplated SPGC cold-rolled steel	
Finish:	Outside / Front : Texture-coated on front panel
Dimensions : (W x D x H)	mm : 482.6 x 634.3 x 66
	inches : 19 x 25 x 2.6
Cooling :	Middle: 2 x 60x25mm + 2 x 60x38mm fans
Power Supply :	● Descriptions
	40X 400W ATX PFC
	50E 500W EPS-12V PFC
Expansion : Up to 2 x PCI slots (full height, full length)	
Controls : Power on/off and system reset + 2 x USB ports	
Indicators : Power, LAN and HDD LEDs	
System Board : Up to 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant M/B	

Drive Bay :	External	5.25"	0
		3.5"	0
		3.5" hot-swap	4
	Internal	2.5" hot-swap	0
		3.5"	0
		Slim CD-Rom/DVD-Rom	1
		Slim FDD	0
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Backplane :	■ Descriptions		
	SS2	Serial ATA (SATA) 3G	
	SC3	Parallel SCSI U320	
	SA1C	SAS 3G (CPLD with SGPIO)	
Riser Card Options :	RCD-15U8E1XRIB	RCD-15UX1X1RIB	
Mounting Options :	BKT-1U01	BKT-1L-090-04400-G	
	BKT-1L-090-04500-G	FRR-1U26-C-R	

Mechanical Drawing

