


# RMC-1T-0

Applications
Internet Server (Web / Mail)
Firewall / VPN
HPC Clustering
File Server
Telephony / Telecom / VoIP
Network / Security Appliance
Military Application

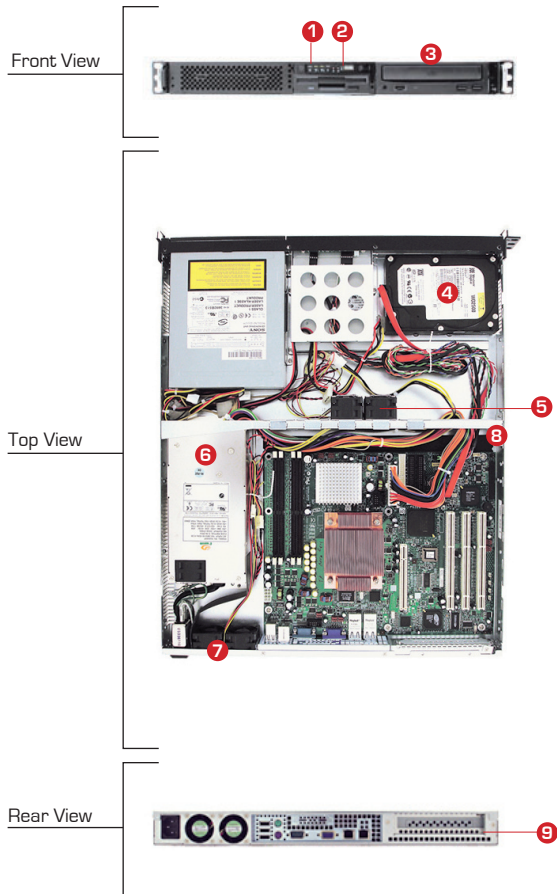

Features & Benefits
1 Power on/off, system reset and LEDs for HDD & LAN
2 Front access USB port
3 One(1) external 5.25-inch optical bay supported
4 One(1) internal 3.5-inch HDD supported
5 Two(2) hot-swap middle fans for optimized cooling + 3 optional
6 1U form factor power supply
7 Two(2) rear fans for optimized cooling
8 Adjustable crossbar for EEB or CEB size motherboard
9 One(1) PCI slot via riser card

Model Number : RMC-1T-0	
Order Information : RMC-1T-●-0	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty preplated SPGC cold-rolled steel	
Finish:	Outside / Front : Texture-coated on front panel
Dimensions : (W x D x H)	mm : 482.6 x 533.6 x 44.4
	inches : 19 x 21 x 1.75
Cooling :	Middle: 2 x 40x28mm easy-swap fans (+ optional 3 x 40x28mm fans) Rear: 2 x 40x28mm fans (13K RPM)
	● Descriptions
Power Supply :	25X 250W ATX PFC
	30X 300W ATX PFC
	35E 350W EPS-12V PFC
	40E 400W EPS-12V PFC
Expansion : 1 full-height expansion slot via riser card (reversible)	
Controls : Power on/off, system reset, 1 x USB port	
Indicators : Power, LAN, and HDD LEDs	
System Board : Up to 12"(W) x 10.5"(D) ATX/SSI CEB compliant M/B	

Drive Bay :	External	5.25"	1
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
	Internal	3.5"	1
	Slim CD-Rom/DVD-Rom		0
	Slim FDD		0
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 10 kgs / 22 lbs			
Packaging Dimension (W x D x H) :		mm : 570 x 680 x 160	
Cubic Feet : 2.2			
Reference Container Loading :	20'	477	
	40'	954	
	40' H	1090	
Riser Card Options :	RCD-1U1PCI32R	RCD-1U1PCI32RIB	
	RCD-1U1PCI64	RCD-1UR1PCI64	
	RCD-1U1PCI64RIB		
Mounting Options :	BKT-1U01	BKT-1L-090-04400-G	
	BKT-1L-090-04500-G	FRR-1U20-CR	
	FRR-1U26-C-R		

*Note: Please contact our sales rep for MB I/O shield option*

## Mechanical Drawing

