

RMC-2F-2

Applications

Internet Server (Web / Mail)


HPC Clustering

Database Server

File Server

NAS / iSCSI

CCTV Surveillance DVR

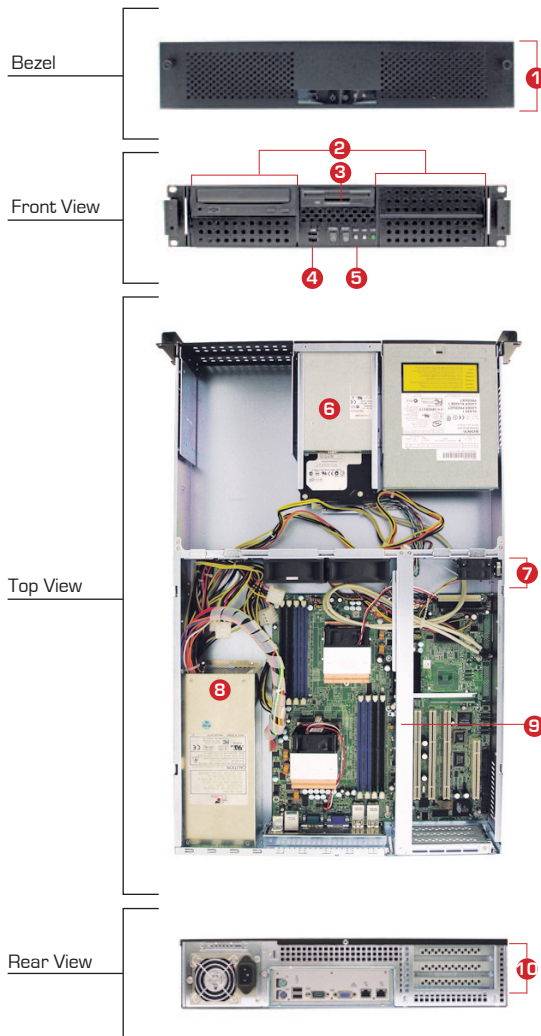

Features & Benefits

- 1 Front bezel for data security and protection
- 2 Four(4) external 5.25-inch optical bays supported
- 3 One(1) external 3.5-inch optical bay supported
- 4 Front access dual USB port
- 5 Power on/off, system reset and LEDs for HDD & LAN
- 6 One(1) internal 3.5-inch HDD supported
- 7 Three(3) hot-swap middle fans for optimized cooling - [Upgradable to six(6)]
- 8 2U form factor power supply
- 9 Riser card mounting bracket
- 10 Three(3) PCI slots via riser card

Model Number : RMC-2F-2	
Order Information : RMC-2F-●-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 685.4 x 88.2
	inches : 19 x 27 x 3.5
Cooling :	Middle: 2 x 80x32mm + 1 x 40x28mm easy-swap fans (+ optional 3 x 40x28mm)
Power Supply :	● Descriptions
	46E 460W EPS-12V PFC
	46R 460W 1+1 hot-swap redundant PFC
	50R 500W 1+1 hot-swap redundant PFC
	60E 600W EPS-12V PFC
Expansion : 3 x PCI slot via riser card (full height, full length) or 7 x low profile PCI slots	
Controls : Power on/off and system reset + 2 x USB ports	
Indicators : Power, LAN and HDD LEDs	
System Board : Up to 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant M/B	

Drive Bay :	External	5.25"	4
		3.5"	1
		3.5" hot-swap	0
	Internal	2.5" hot-swap	0
		3.5"	1
		Slim CD-Rom/DVD-Rom	0
		Slim FDD	0
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 15.5 kgs / 34.1 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 850 x 250	
Cubic Feet : 4.4			
Reference Container Loading :	20'	238	
	40'	477	
	40' H	545	
Riser Card Options :	RCD-2U3PCI32	RCD-2U2PCI64	
	RCD-E161P2R-3		
Mounting Options :	BKT-2M-010-04400-G	SLR-20	
	SLR-26R		

Mechanical Drawing

