


RMC-2GD-0Q1

Applications

- HPC Clustering
- Database Server
- Enterprise Storage Server
- High-end Workstation

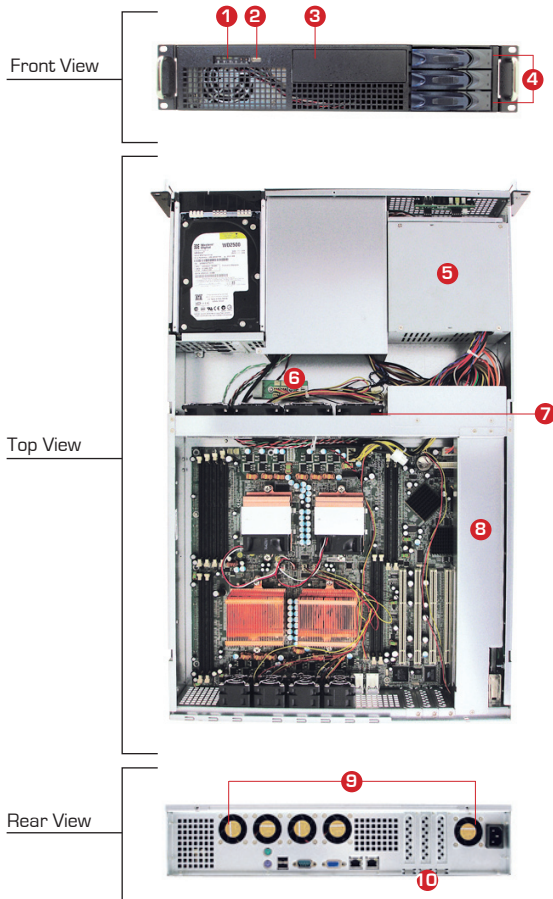

Features & Benefits

- 1 Power on/off, system reset and LEDs for HDD & LAN
- 2 Front access USB port
- 3 One(1) external 5.25-inch optical bay supported
- 4 Three(3) external 3.5-inch hot-swap HDD supported
- 5 700W power supply
- 6 One(1) 6-port fan board to simplify fan cabling
- 7 Four(4) middle fans for optimized cooling
- 8 Rear air-channel for power supply heat dissipation
- 9 Five(5) rear fans for optimized cooling
- 10 Three(3) low profile PCI slots



RMC-2GD-0Q1

Model Number : RMC-2G-0Q1	
Order Information : RMC-2G-●-0Q1	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty preplated SPGC cold-rolled steel	
Finish:	Outside / Front : Texture coated on front panel
Dimensions : (W x D x H)	mm : 482.6 x 674.6 x 88.2
	inches : 19 x 26.6 x 3.5
Cooling :	Middle: 4 x 60x38mm fans
	Rear: 5 x 40x28mm fans
Power Supply :	● Descriptions
	70E 700W EPS-12V PFC
Expansion : 3 x low profile PCI slots	
Controls : Power on/off and system reset + USB port	
Indicators : Power, LAN and HDD LEDs	
System Board : 16"(W) x 13"(D) Tyan® S4985™ Quad-Opteron M/B	

Drive Bay :	External	5.25"	1
		3.5"	0
		3.5" hot-swap	3
		2.5" hot-swap	0
	Internal	3.5"	0
		Slim CD-Rom/DVD-Rom	0
		Slim FDD	0
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 22.5 kgs / 49.5 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 840 x 290	
Cubic Feet : 5			
Reference Container Loading :	20'	210	
	40'	420	
	40' H	470	
Backplane :	■ Descriptions		
	SS2	Serial ATA (SATA) 3G	
	SC3	Parallel SCSI U320	
	SA1C	SAS 3G (CPLD with SGPIO)	
Mounting Options :	BKT-2M-010-04400-G	SLR-20	
	SLR-26R		

Mechanical Drawing

