


RMC-2R-2

Applications	
Internet Server (Web / Mail)	
File Server	



BTO

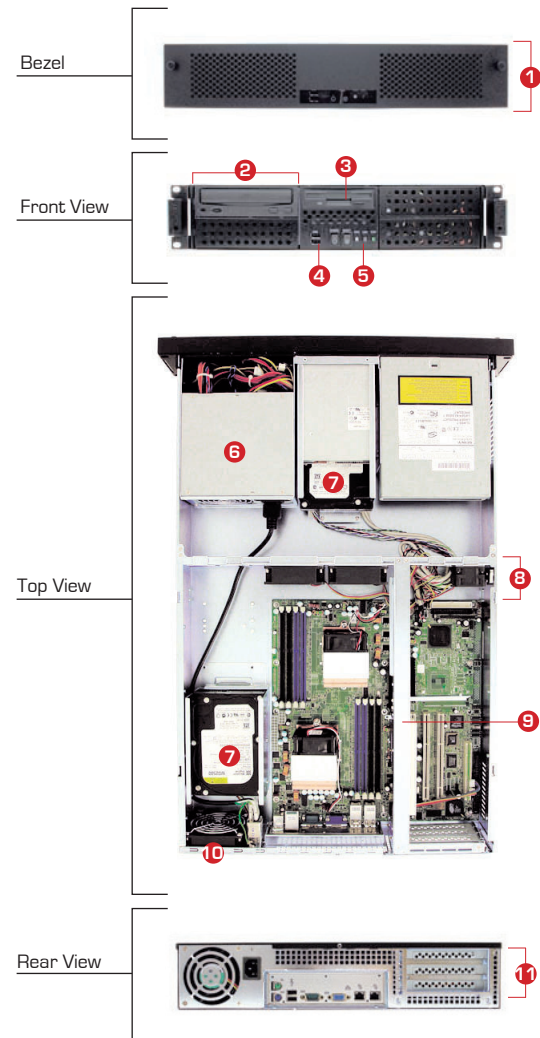

Features & Benefits	
1	Front bezel for data security and protection
2	Four(4) external 5.25-inch bay supported
3	One(1) external 3.5-inch bay supported
4	Front access dual USB port
5	Power on/off, system reset and LEDs for HDD & LAN
6	PS/2 size power supply
7	Four(4) internal 3.5-inch HDD supported
8	Three(3) hot-swap middle fans for optimized cooling
9	Riser card mounting bracket
10	One(1) rear fan for optimized cooling
11	Three(3) PCI slots via riser card

BTO Built-to-Order (BTO) : Minimum Order Quantity (MOQ) 100	
Model Number : RMC-2R-2	
Order Information : RMC-2R-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 685.5 x 88.2
	inches : 19 x 27 x 3.5
Cooling :	Middle: 2 x 80x25mm fans (optional 4 x 40x28mm upgrade - order as module)
	Rear: 1 x 80x25mm fan
Power Supply :	● Descriptions
	30X 300W ATX PFC 46E 460W EPS-12V PFC
Expansion : 3 x PCI slot via riser card (full height, full length) 7 x low profile PCI slots	
Controls : Power on/off and system reset + 2 x USB ports	
Indicators : Power, LAN, and HDD LEDs	
Speakers : 0.4W built-in	
System Board : Up to 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant M/B	

Drive Bay :	External	5.25"	2
		3.5"	1
		3.5" hot-swap	0
	Internal	2.5" hot-swap	0
		3.5"	4
		Slim CD-Rom/DVD-Rom	0
	Slim FDD	0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 16.5 kgs / 36.3 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 850 x 250	
Cubic Feet : 4.4			
Reference Container Loading :	20'	238	
	40'	477	
	40' H	545	
Riser Card Options :	RCD-2U3PCI32	RCD-2U2PCI64	
	RCD-E161P2R-3		
Mounting Options :	BKT-2M-010-04400-G	SLR-26	

Mechanical Drawing

