


RMC-3F-0

Applications
Database Server
File Server
CCTV Surveillance DVR

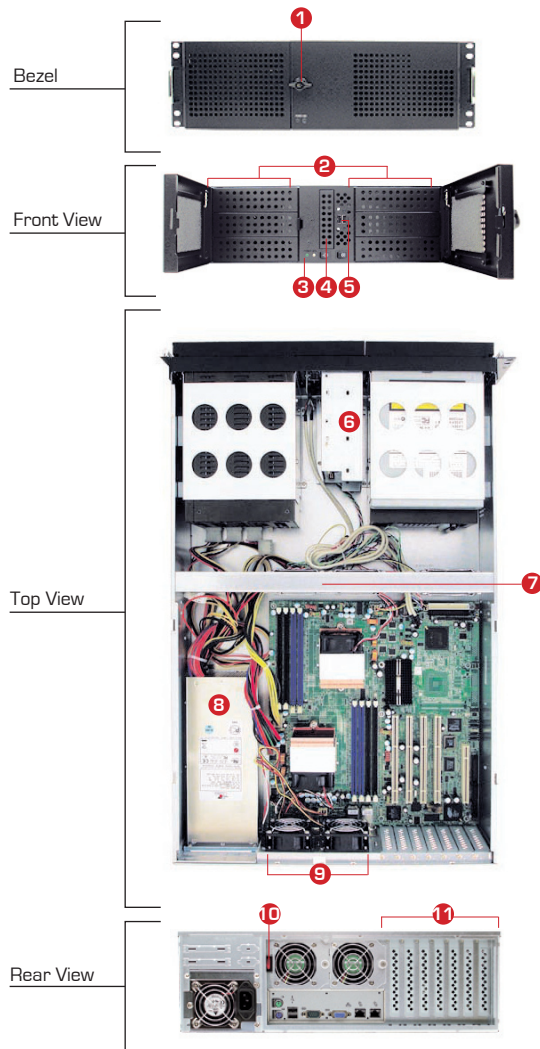

Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Six(6) external 5.25-inch bays supported
- 3 Power on/off, system reset and LEDs for HDD & LAN
- 4 One(1) external 3.5-inch bay supported
- 5 Front access dual USB port
- 6 One(1) internal 3.5-inch HDD supported
- 7 Two(2) middle fans for optimized cooling [Two(2) extra fan slot for upgrade]
- 8 Single or redundant power supply
- 9 Two(2) easy-swap rear fan for optimized cooling
- 10 Rear access power supply alarm reset
- 11 Seven(7) PCI slots attribute to network expansion and scalability

Model Number : RMC-3F-0		
Order Information : RMC-3F-●-0		
Industry Standard : EIA-RS310D		
Materials : Heavy-duty preplated SPGC cold-rolled steel		
Finish :	Outside / Front : Texture coated on front panel	
Dimensions : (W x D x H)	mm : 482.6 x 660.4 x 133.35	
	inches : 19 x 26 x 5.25	
Cooling :	Middle: 3 x 80x25mm ball-bearing fans (+ optional 1 x 80x25mm) (optional 3 x 80x32mm upgrade)	
	Rear: 2 x 60x25mm ball-bearing fans (optional 2 x 60x38mm upgrade)	
Power Supply :	● Descriptions	
	30X	300W ATX PFC
	35R	350W ATX hot-swap redundant PFC
	46E	460W EPS-12V PFC
	46R	460W 2+1 hot-swap redundant PFC
	60E	600W EPS-12V PFC
60R	600W 2+1 hot-swap redundant PFC	
Expansion : 7 x PCI slots (full height, full length)		
Controls : Power on/off and system reset + 2 x USB ports		

Indicators : Power and HDD LEDs			
System Board : Up to 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant M/B			
Drive Bay :	External	5.25"	6
		3.5"	1
		3.5" hot-swap	0
	Internal	2.5" hot-swap	0
		3.5"	1
		Slim CD-Rom/DVD-Rom	0
	Slim FDD	0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 18 kgs / 39.6 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 850 x 300	
Cubic Feet : 5.2			
Reference Container Loading :	20'	200	
	40'	400	
	40' H	450	
Mounting Options :	BKT-2M-010-04400-G	BKT-2S-010-24200-F	
	SLR-26		

Mechanical Drawing

