

RMC-3N-0


Applications

Internet Server (Web / Mail)

File Server

NAS/iSCSI

CCTV Surveillance DVR

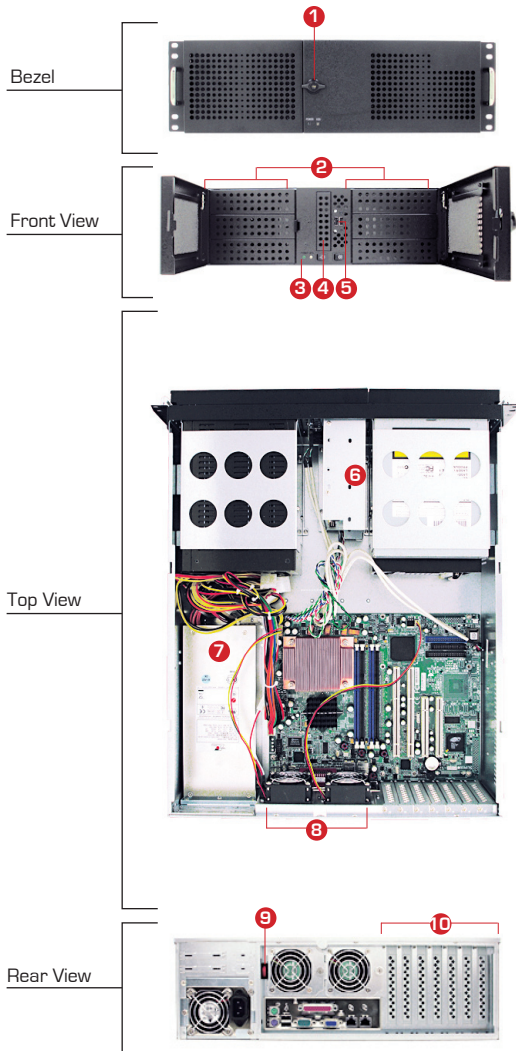

Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Six(6) external 5.25-inch optical bays supported
- 3 Power on/off, system reset and LEDs for HDD & LAN
- 4 One(1) external 3.5-inch optical bay supported
- 5 Front access dual USB port
- 6 One(1) internal 3.5-inch HDD supported
- 7 Single or redundant power supply options
- 8 Two(2) easy-swap rear fan for optimized cooling
- 9 Rear access power supply alarm reset
- 10 Seven(7) PCI slots attribute to network expansion and scalability

Model Number : RMC-3N-0	
Order Information : RMC-3N-●-0	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty preplated SPGC cold-rolled steel	
Finish:	Outside / Front : Texture coated on front panel
Dimensions : (W x D x H)	mm : 482.6 x 530 x 133.35
	inches : 19 x 21 x 5.25
Cooling :	Rear: 2 x 60x25mm fans (optional 60x38mm upgrade)
	● Descriptions
Power Supply :	30X 300W ATX PFC
	40R 400W hot-swap redundant PFC
	46E 460W EPS-12V PFC
Expansion : 7 x PCI slots (full height)	
Controls : Power on/off and system reset + 2 x USB ports	
Indicators : Power and HDD LEDs	
System Board : Up to 12"(W) x 10.5"(D) ATX/SSI CEB compliant M/B	

Drive Bay :	External	5.25"	6
		3.5"	1
		3.5" hot-swap	0
		2.5" hot-swap	0
	Internal	3.5"	1
Slim CD-Rom/DVD-Rom		0	
Slim FDD		0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Gross Weight : 15 kgs / 33 lbs			
Packaging Dimension (W x D x H) :		mm : 580 x 710 x 300	
Cubic Feet : 4.4			
Reference Container Loading :	20'	238	
	40'	477	
	40' H	545	
Mounting Options :	BKT-2M-010-04400-G	BKT-2S-010-24200-F	
	SLR-20	SLR-26	

Mechanical Drawing

