


# RMC-4F-2

Applications
Database Server
File Server
Enterprise Storage Server
CCTV Surveillance DVR

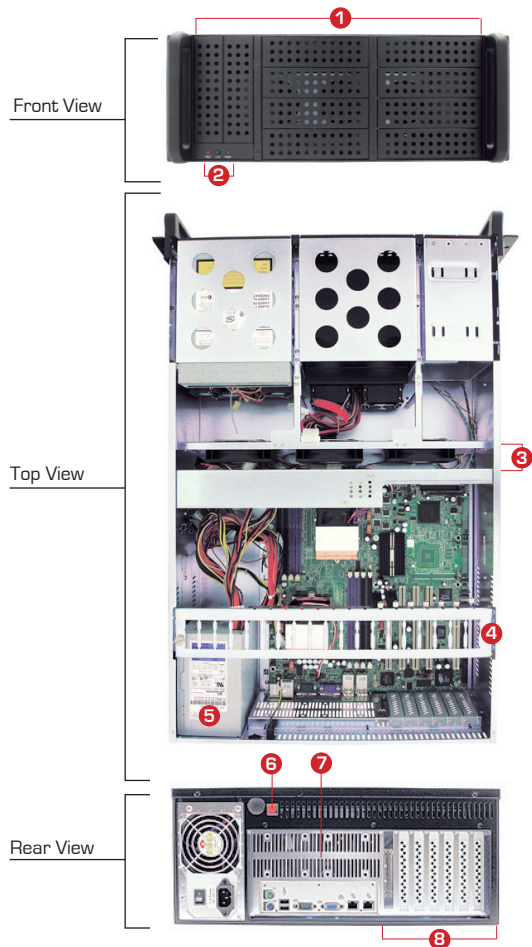

Features & Benefits	
1	Ten(10) external 5.25-inch optical bays supported
2	LEDs for RES, I/O & PWR
3	Three(3) middle fans for optimized cooling
4	Hold down bar to ensure that HBA cards are locked into positions
5	PS/2 size single or redundant power supply options
6	Rear access power supply alarm reset
7	Two(2) rear fan slots for upgrade
8	Seven(7) PCI slots attribute to network expansion and scalability

Model Number : RMC-4F-2	
Order Information : RMC-4F-●-2	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 666.6 x 176.8
	inches : 19 x 26 x 7
Cooling :	Middle: 3 x 90mm fans (+ optional 2 x 60mm fans)
Power Supply :	● Descriptions
	30X 300W ATX PFC
	30R 300W ATX hot-swap redundant PFC
	40E 400W EPS-12V PFC
	40R 400W hot-swap redundant PFC
	46E 460W EPS-12V PFC
	46R 460W hot-swap redundant PFC
65R 650W hot-swap redundant PFC	
Expansion : 7 x PCI slots (full height, full length)	

Controls : Power on/off, system reset		
Indicators : Power LED		
System Board : 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant M/B		
Drive Bay :	External	5.25" 10
		3.5" 0
		3.5" hot-swap 0
	Internal	2.5" hot-swap 0
	3.5" 0	
	Slim CD-Rom/DVD-Rom	0
	Slim FDD	0
Temperature : 0°C(32°F) ~ 50°C(122°F)		
Humidity : 5%~95% non-condensing		
Gross Weight (lbs) : 21 kgs / 46.2 lbs		
Packaging Dimension (W x D x H) :		mm : 590 x 850 x 330
Cubic Feet : 5.9		
Reference Container Loading :	20'	175
	40'	355
	40' H	395
Mounting Options :	BKT-2M-010-04400-G	BKT-2S-010-24200-F
	SLR-26	

## Mechanical Drawing

