


# RSA-3ED2-2

Applications
Database Server
File Server
Enterprise Storage Server
Near-line Storage Server
Virtual Tape Library
NAS / iSCSI
CCTV Surveillance DVR
Medical Imaging Server
Digital Content Delivery (DCD)

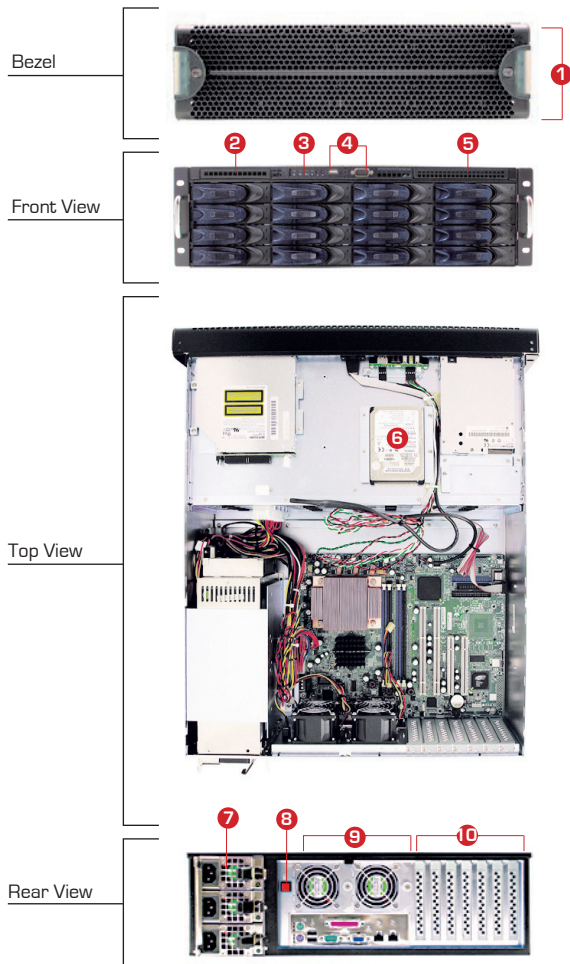

## Features & Benefits

- |           |  |
|-----------|--|
| <b>1</b>  | Front bezel with lock for data security and protection                   |
| <b>2</b>  | One(1) external slim floppy drive supported                              |
| <b>3</b>  | Power on/off, system reset and LEDs for HDD & LAN                        |
| <b>4</b>  | Front access USB port & serial console                                   |
| <b>5</b>  | One(1) external slim CD-ROM supported                                    |
| <b>6</b>  | One(1) internal 2.5-inch HDD supported                                   |
| <b>7</b>  | Hot-swap redundant power supply (2+1 module) maximizes server protection |
| <b>8</b>  | Rear access power supply alarm reset                                     |
| <b>9</b>  | Two(2) easy-swap rear fans for optimized cooling                         |
| <b>10</b> | Seven(7) PCI slots attribute to network expansion and scalability        |



**BTO** Built-to-Order (BTO) : Minimum Order Quantity (MOQ) 50

Model Number : RSA-3ED2-2

Order Information : RSA-3ED2-●■-2

Industry Standard : EIA-RS310D

Materials : Heavy-duty cold-rolled steel

Finish : Inside / Body : Zinc-plated with bright chromate  
 Outside / Front : Texture-coated

Dimensions : mm : 482.6 x 517.2 x 132.5  
 (W x D x H) inches : 19 x 20.4 x 5.25

Cooling : Rear : 2 x 60x38mm fans

Power Supply : ● Descriptions  
 46R 460W hot-swap redundant PFC

Expansion : 7 x PCI slots (full height, full length)

Controls : Power on/off and system reset + USB + serial port

Indicators : Power, LAN and HDD LEDs

System Board : 12"(W) x 10.5"(D) SSI CEB compliant M/B

Drive Bay :	External	5.25"	0
		3.5" hot-swap	16
		2.5" hot-swap	0
	Internal	2.5"	1
		Slim CD-Rom/DVD-Rom	1
		Slim FDD	1

Temperature : 0°C(32°F) ~ 50°C(122°F)

Humidity : 5%~95% non-condensing

Backplane :	■	Descriptions
SS2		Serial ATA
SC3		Parallel SCSI
Mounting Options :		FRR-FR20-TW-R (included)

## Mechanical Drawing

