


RSC-2A-2

Applications

Database Server
Enterprise Storage Server
NAS / iSCSI
Medical Imaging Storage Server
Digital Content Delivery (DCD)

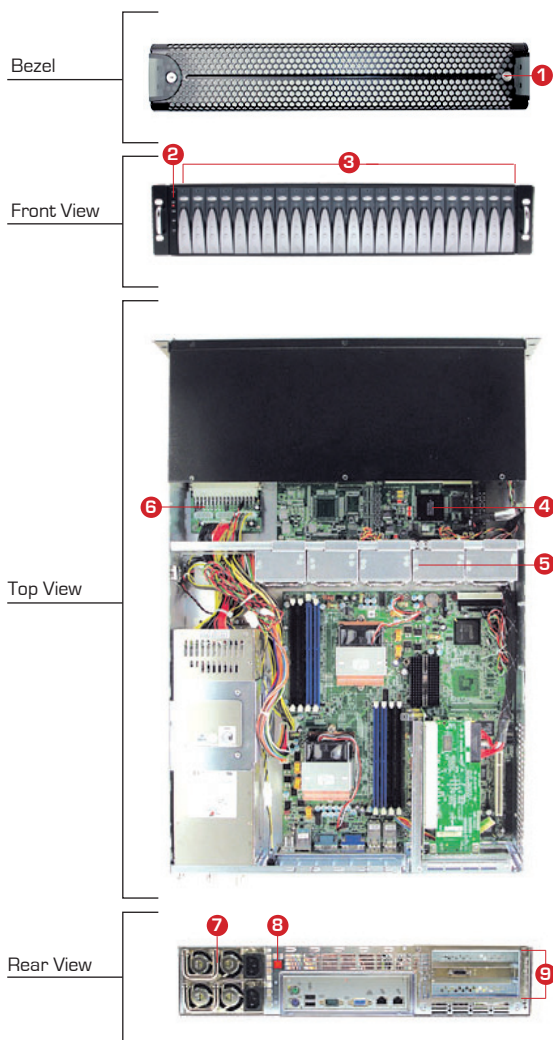

Features & Benefits

- 1 Front bezel with lock for data security and protection
- 2 Power on/off, system reset and LEDs for power, HDD & LAN
- 3 Twenty-four(24) external 2.5-inch hot-swap HDD supported
- 4 Single 36-port expander (optional dual expander)
- 5 Five(5) hot-swap middle fans for optimized cooling
- 6 Power distribution board simplifies cabling and enhances cooling
- 7 Hot-swap redundant power supply (1+1 module) maximizes server protection
- 8 Rear access power supply alarm reset
- 9 Three(3) PCI slot via riser card or seven(7) PCI slot low profile



Serial
Attached
SCSI



Model Number : RSC-2A-2

Order Information : RSC-2A-●■-2

Industry Standard : EIA-RS310D

Materials : Heavy-duty cold-rolled steel

Finish : Inside / Body : Zinc-plated with bright chromate
Outside / Front : Texture-coated

Dimensions : mm : 482.6 x 660 x 87
(W x D x H) inches : 19 x 26 x 3.4

Cooling : Middle: 5 x 60x38mm fans

Power Supply : ● Descriptions
50R 500W 1+1 hot-swap redundant PFC

Expansion : 3 x PCI slots via riser card (full height, full length)
7 x low profile PCI slots

Controls : Power on/off and system reset on front panel

Indicators : HDD LEDs for power, activity and failure

System Board : Up to 12"(W) x 13"(D) E-ATX/SSI EEB 3.6
compliant M/B

Drive Bay :

External	5.25"	0
	3.5"	0
	3.5" hot-swap	0
	2.5" hot-swap	24
Internal	2.5" HDD	1
	Slim CD-Rom/DVD-Rom	0
	Slim FDD	0

Temperature : 0°C(32°F) ~ 50°C(122°F)

Humidity : 5%~95% non-condensing

Gross Weight : 18 kgs / 39.6 lbs

Reference Container Loading :	20'	300
	40'	600
	40' H	685

Backplane :	■	Descriptions
	SA1S	SAS 3.0 (Single Expander)
	SA1D	SAS 3.0 (Dual Expander)

Mounting Options : FRR-FR20-TW (included)

Mechanical Drawing

