


RSC-4ED2-0

Applications
Database Server
Enterprise Storage Server
Near-line Storage Server
Virtual Tape Library
NAS / iSCSI
CCTV Surveillance DVR
Medical Imaging
Digital Content Delivery



Features & Benefits
1 Front bezel for data security and protection
2 Twenty-four(24) external 5.25-inch optical bays supported
3 Two(2) internal 3.5-inch HDD supported
4 Two(2) easy-swap rear fans for optimized cooling
5 Two(2) hot-swap rear blowers for optimized cooling
6 Seven(7) PCI slots attribute to network expansion and scalability
7 Rear access power supply alarm reset
8 Hot-swap redundant power supply (3+1 module) maximizes server protection

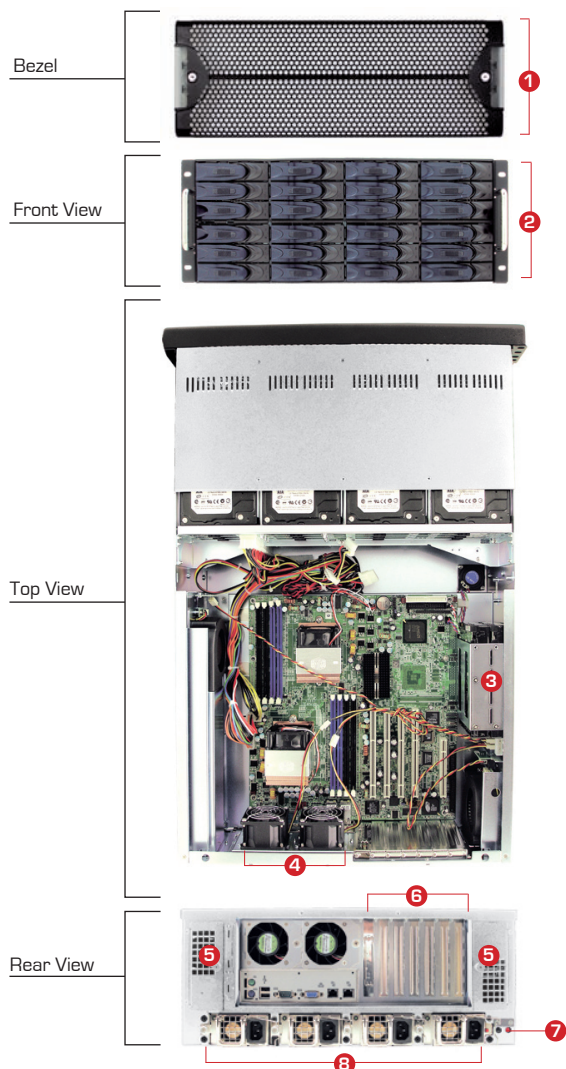

Model Number : RSC-4ED2-0	
Order Information : RSC-4ED2-●-■-0	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty preplated SPGC cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 673 x 176.1 inches : 19 x 26.5 x 7
Cooling :	Rear : 2 x 97mm hot-swap blowers + 2 x 60x38mm easy-swap fans
Power Supply :	● Descriptions
	95R 950W 3 + 1 hot-swap redundant power supply
Expansion : 7 x PCI slots (full height, full length)	
System Board : 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant M/B	

Drive Bay :	External	5.25"	0
		3.5"	0
		3.5" hot-swap	24
		2.5" hot-swap	0
	Internal	3.5"	2
Slim CD-Rom/DVD-Rom		0	
Slim FDD		0	
Temperature : 0°C(32°F) ~ 50°C(122°F)			
Humidity : 5%~95% non-condensing			
Packaging Dimension (W x D x H) :		mm : 610 x 1000 x 340	
Cubic Feet : 7.3			
Reference Container Loading :	20'	140	
	40'	285	
	40' H	320	
Backplane:	■ Descriptions		
	SS2	Serial ATA (SATA) 3G	
	SC3	Parallel SCSI U320	
	SA1C	SAS 3G (CPLD with SGPIO)	
Mounting Options :	FRR-FR28-TW-R (2 pairs included)		

Mechanical Drawing

